



INTENS

Exceptionally robust



SINGLE-PHASE GENERATING SETS

Type		HX 2500	HX 3000	HX 4000	HX 6000	HX 6080
Max power 230 V	kW ISO 8528	2.2	3.0	4.0	6.0	6.0
	kVA ⁽¹⁾	2.4	3.75	4.5	6.6	7.5
Engine	Brand	Honda®	Honda®	Honda®	Honda®	Honda®
	Type	GX 160	GX 200	GX 270	GX 390	GX 390
	Oil level shutdown	•	•	•	•	•
	Electric start	X	X	X	X	X
	HP 3.600 rpm	4.8	5.5	8	11	11
	Run time in hr	3.4	2.4	2.5	2.4	2.4
	Tank in L	3.1	3.1	5.3	6.1	6.1
EEC Noise level Lwa	dB(A) @ 7 m	71	72	74	74	74
	Weight in Kg	38	41	56	79	76
	Socket codes ⁽²⁾	P1L	P1L	P1L	P1H	P1H

THREE-PHASE GENERATING SETS

Type			HX 5000 T	HX 7500 T*
Max power	3-ph 400 V	kW ISO 8528	4.0	6.0
		kVA ⁽¹⁾	5.0	7.5
	1-ph 230V	kW ISO 8528	2.3	2.3
Engine	Brand	Honda®	Honda®	
	Type	GX 270	GX 390	
	Oil level shutdown	•	•	
	Electric start	X	X	
	HP 3.600 rpm	8	11	
	Run time in hr	2.5	2.4	
Tank in L	5.3	6.1		
EEC Noise level Lwa	dB(A) @ 7 m	74	74	
	Weight in Kg	68	80	
	Socket codes ⁽²⁾	P1J	P1J	

X Not available. • Standard. (1) Theoretical value calculated for comparison purposes. (2) See table of sockets on page 39.

*This generating set may be fitted with an IP54 alternator.



Options available for this range depending on the model: trolley kit, RCCB, Quick'lock, manual changeover switch, loose cover, maintenance kit. See pages 34 to 36 for the part numbers for these options.

SDMO FEATURE

Conformity with European standards

All INTENS generating sets have HONDA® engines which have been selected for their high performance and suitability for both European and international markets.

The INTENS standard range complies with all European standards and directives.

The INTENS C range complies with EC directives and with Directive 97/68/EC relating to measures against the emission of gaseous and particulate pollutants from internal combustion engines to be installed in non road mobile machinery. Generator in this range do not however comply with the noise emission of outdoor equipment Directive 2000/14 EC.


The INTENS S range does not comply with European directives.



HX 3000

- 3 kW - 3.75 kVA⁽¹⁾ - 230 V
- HONDA® - GX 200 engine
- EEC Noise level Lwa
95 Lwa / 72 dB(A) @ 7 m


Application*:
ideal for use with grinders.

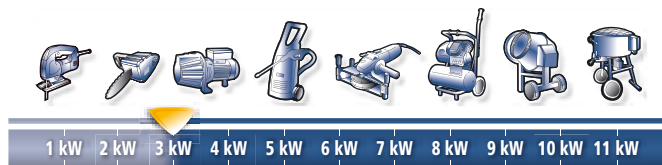

HX 4000

- 4 kW - 4.5 kVA⁽¹⁾ - 230 V
- HONDA® - GX 270 engine
- EEC Noise level Lwa
97 Lwa / 74 dB(A) @ 7 m

Application*:
ideal for use with pneumatic drills.

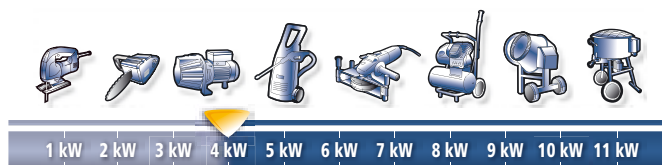

HX 6080

- 6 kW - 7.5 kVA⁽¹⁾ - 230 V
- HONDA® - GX 390 engine
- EEC Noise level Lwa
97 Lwa / 74 dB(A) @ 7 m

Application*:
ideal for use with welding sets.



SDMO FEATURE

Oversized alternator for reliable power.



*For information only.