




PACIFIC  
T 8K

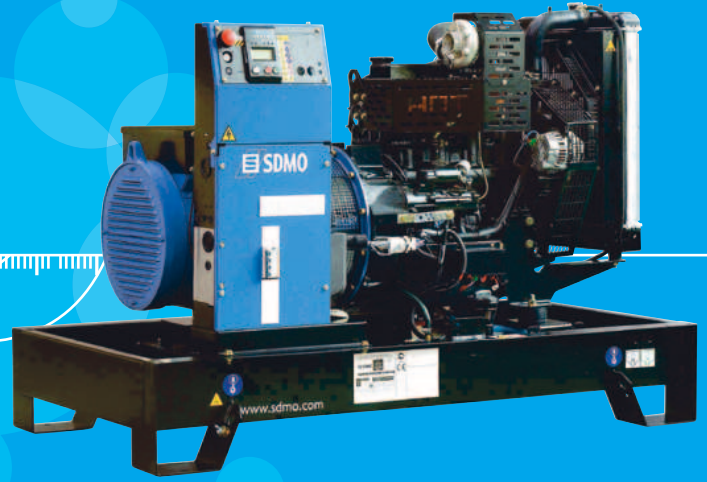

PACIFIC  
T 40U

4

## TECHNICAL SPECIFICATIONS

## THREE PHASE GENERATING SETS

50 Hz specifications 400-230 V				60 Hz specifications 480-277 V				General specifications								
GENERATING SETS <sup>(1)</sup>	kVA Cos 0.8		Cons 3/4 L/h	GENERATING SETS <sup>(2)</sup>	kWe ISO 8528*		Cons 3/4 L/h	Engine					Alternator	Open version <sup>(5)</sup>		
	PRP <sup>(3)</sup>	ESP <sup>(4)</sup>			PRP <sup>(3)</sup>	ESP <sup>(4)</sup>		Engine type	cyl	Bore (mm)	Stroke (mm)	Cyl (L)	Type	Dimensions lxxwxh (m)	Weights <sup>(6)</sup> (kg)	Tank (L)
T9HK <sup>(8)</sup>	-	9	2.6	-	-	-	-	L2E SDH	2L	76	70	0.64	FT2MBS	1.22x0.70x0.92	240	50
T12HK <sup>(8)</sup>	-	12	4.2	-	-	-	-	L3E SDH	3L	76	70	0.95	FT2MBS	1.22x0.70x0.92	260	50
T15HK <sup>(8)</sup>	-	15	4.2	-	-	-	-	L3E SDH	3L	76	70	0.95	FT2MBS	1.41x0.72x1.03	294	50
T20HK <sup>(8)</sup>	-	20	5.5	-	-	-	-	S3L2 SDH	3L	78	92	1.33	ECP3-2L	1.41x0.72x1.05	386	50
T27HK <sup>(8)</sup>	-	27	6.3	-	-	-	-	S4L2SDH	4L	78	92	1.76	ECO28-2L	1.70x0.90x1.12	530	100
T8K	6.8	7.5	1.7	-	-	-	-	L3 E SD	3L	76	70	0.95	ECP3-2S	1.22x0.70x0.92	287	50
T12K	10.5	11.5	2.5	T11U	10.2	11.2	3.2	S3L2 SD	3L	78	92	1.33	ECP3-1L	1.41x0.72x1.05	387	50
T16K	14.5	16	3.4	T16U	14.5	16	4.2	S4L2 SD	4L	78	92	1.76	ECP3-1L	1.41x0.72x1.05	406	50
T22K	20	22	4.7	T20U	18.2	20	5.6	S4 O2 SD	4L	88	103	2.50	ECO28-1L	1.70x0.90x1.12	560	100
T33K	30	33	6	T30U	27.3	30	8.2	S4S SD	4L	94	120	3.33	ECO28VL	1.70x0.90x1.14	660	100
T44K	40	44	7.3	T40U	36.4	40	8.7	S4S DT	4L	94	120	3.33	ECO32-3S	1.70x0.90x1.16	680	100

## TECHNICAL SPECIFICATIONS

## SINGLE PHASE GENERATING SETS

Specifications 50 Hz 230 V				Specifications 60 Hz 240 V				General specifications								
GENERATING SETS <sup>(7)</sup>	kVA Cos 0.8		Cons 3/4 L/h	GENERATING SETS	kWe ISO 8528*		Cons 3/4 L/h	Engine					Alternator	Open version <sup>(5)</sup>		
	PRP <sup>(3)</sup>	ESP <sup>(4)</sup>			PRP <sup>(3)</sup>	ESP <sup>(4)</sup>		Engine type	cyl	Bore (mm)	Stroke (mm)	Cyl (L)	Type	Dimensions lxxwxh (m)	Weights <sup>(6)</sup> (kg)	Tank (L)
T8HKM <sup>(8)</sup>	-	7.5	2.6	-	-	-	-	L2E SDH	2L	76	70	0.64	S20FS-130	1.22x0.70x0.92	(kg)	50
T11HKM <sup>(8)</sup>	-	10.5	4.2	-	-	-	-	L3E SDH	3L	76	70	0.95	ECP3-2L	1.22x0.70x0.92	287	50
T6KM	5	5.5	1.7	-	-	-	-	L3E SD	3L	76	70	0.95	ECP3-2S	1.22x0.70x0.92	280	50
-	-	-	-	T8UM	6.8	7.5	2.2	L3E SD	3L	76	70	0.95	ECP3-2S	1.22x0.70x0.92	280	50
T9KM	7.8	8.6	2.5	T11UM	9.1	10	3.2	S3L2 SD	3L	78	92	1.33	ECP3-2L	1.41x0.72x1.05	396	50
T12KM	10.9	12	3.4	T16UM	13.6	15	4.2	S4L2 SD	4L	78	92	1.76	ECP28-1L	1.41x0.72x1.05	452	50
T17C2M	15.5	17	4.8	T20UM	18.2	20	5.6	S4O2 SD	4L	88	103	2.50	ECP28VL	1.70x0.90x1.12	580	100
T25C2M	22.7	25	6.6	-	-	-	-	S4S SD	4L	94	120	3.33	ECP32-S	1.70x0.90x1.14	710	100
-	-	-	-	T30UM	27.3	30	8.2	S4S SD	4L	94	120	3.33	ECP28VL	1.70x0.90x1.14	660	100
-	-	-	-	T40UM	36.4	40	8.7	S4S DT	4L	94	120	3.33	482M45	1.70x0.90x1.14	730	100

(1) Also available in the following voltages: 415/240 V - 380/220 V - 220/127 V - 200/115 V

(2) Also available in the following voltages: 440/254 V - 220/127 V - 208/120 V

(3) PRP: Main power available continuously with variable load for an unlimited time per year in accordance with ISO 8528-1.

(4) ESP: Standby power available for emergency use with variable load in accordance with ISO 8528-1.

no overload available with this service.

(5) The dimensions and weights apply to a generating set specified in the price list, without options

(6) Dry weight - without fuel

(7) Also available in the following voltages: 220 V - 240 V

(8) The 'H' in the genset names refers to an engine speed of 3000 rpm for the 50 Hz versions and 3600 rpm for the 60 Hz versions

\* ISO 8528: powers specified in compliance with the legislation in force