



PRESTIGE

Silent efficiency



ALIZÉ® 3000



ALIZÉ® 6000 E



ALIZÉ® 7500 TE

SINGLE-PHASE GENERATING SETS

Type		ALIZÉ® 3000	ALIZÉ® 6000 E
Max power 230 V	kW ISO 8528	2.8	5.6
	kVA ⁽¹⁾	3.5	6.05
Engine	Brand	Honda®	Honda®
	Type	GX 200	GX 390
	Oil level shutdown	•	•
	Electric start	X	•
	HP 3.600 rpm	5.5	11
	Run time in hr	9.2	9.6
	Tank in L	12	24
EEC Noise level Lwa	dB(A) @ 7 m	71	68
	Weight in Kg	46	130
	Socket codes ⁽²⁾	P1L	P1P

THREE-PHASE GENERATING SETS

Type			ALIZÉ® 7500 TE
Max power	3-ph 400 V	kW ISO 8528	5.6
		kVA ⁽¹⁾	6.6
	1-ph 230V	kW ISO 8528	2.3
Engine	Brand	Honda®	
	Type	GX 390	
	Oil level shutdown	•	
	Electric start	•	
	HP 3.600 rpm	11	
	Run time in hr	9.6	
	Tank in L	24	
EEC Noise level Lwa	dB(A) @ 7 m	68	
	Weight in Kg	132	
	Socket codes ⁽²⁾	P1Q	

X Not available. • Standard. (1) Theoretical value calculated for comparison purposes. (2) See table of sockets on page 39.



Options available for this range depending on the model: trolley kit, RCCB, automatic controller, manual changeover switch, loose cover. See pages 34 to 36 for the part numbers for these options.

SDMO FEATURE

Multipurpose and unobtrusive


Generating sets that are used near people during night-time construction work or in residential areas are required to be more and more quiet. ALIZÉ® 6000 E and 7500 TE generating sets have an integral compact, highly effective sound insulating cover to comply with these requirements and are mobile and easy to use with a complete range of equipment.



ALIZÉ® 3000

- 2.8 kW - 3.5 kVA⁽¹⁾ - 230 V
- HONDA® GX 200 engine
- EEC Noise level Lwa
94 Lwa / 71 dB(A) @ 7 m

Application*:
ideal for use with hot air guns.

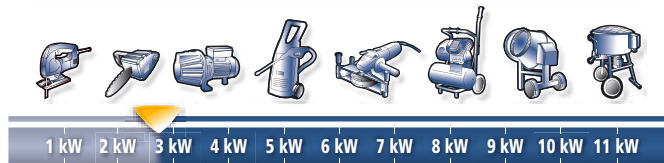

ALIZÉ® 6000 E

- 5.6 kW - 6.05 kVA⁽¹⁾ - 230 V
- HONDA® GX 390 engine
- EEC Noise level Lwa
91 Lwa / 68 dB(A) @ 7 m


Application*:
ideal for use with professional electric ovens.



ALIZÉ® 7500 TE

- 5.6 kW - 6.6 kVA⁽¹⁾ - 400 V
- HONDA® GX 390 engine
- EEC Noise level Lwa
91 Lwa / 68 dB(A) @ 7 m

Application*:
ideal for refrigerated display units.

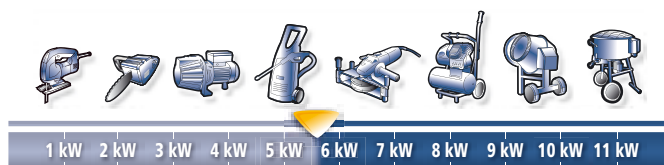

*For information only.